

Multi-variate infilling of missing daily discharge data on the Niger basin

Ganiyu Titilope Oyerinde^{IWA^{a,*}}, Agnide E. Lawin^{a,b} and Oluwafemi E. Adeyeri^c

^a Graduate Research Program (GRP) Climate Change and Water Resources, West African Science Service Center on Climate Change and Adapted Land Use (WASCAL), University of Abomey-Calavi, Abomey-Calavi, BP 526 Cotonou, Benin

^b Laboratory of Applied Hydrology, National Institute of Water, University of Abomey-Calavi, Abomey-Calavi, 01 BP 4521 Cotonou, Benin

^c Department of Meteorology and Climate Science, Federal University of Technology, Akure, Nigeria

*Corresponding author. E-mail: ganiyuoyerinde@yahoo.com

ABSTRACT

The Niger basin has experienced historical drought episodes and floods in recent times. Reliable hydrological modelling has been hampered by missing values in daily river discharge data. We assessed the potential of using the Multivariate Imputation by Chained Equations (MICE) to estimate both continuous and discontinuous daily missing data across different spatial scales in the Niger basin. The study was conducted on 22 discharge stations that have missing data ranging from 2% to 70%. Four efficiency metrics were used to determine the effectiveness of MICE. The flow duration curves (FDC) of observed and filled data were compared to determine how MICE captured the discharge patterns. Mann-Kendall, Modified Mann-Kendall, Pettit and Sen's Slope were used to assess the complete discharge trends using the gap-filled data. Results shows that MICE near perfectly filled the missing discharge data with Nash-Sutcliffe Efficiency (*NSE*) range of 0.94–0.99 for the calibration (1992–1994) period. Good fits were obtained between FDC of observed and gap-filled data in all considered stations. All the catchments showed significantly increasing discharge trend since 1990s after gap filling. Consequently, the use of MICE in handling missing data challenges across spatial scales in the Niger basin was proposed.

Key words: hydrology, multiple imputation, river discharge, spatial scale, trend analysis, West Africa

HIGHLIGHTS

- Runoff data of the Niger basin has a large amount of missing data.
- The quality of existing runoff data was improved by a multiple imputation technique.
- The effectiveness of the multiple imputation algorithm was influenced by the percentage of missing data.
- Trend analysis of gap-filled data shows significantly increasing trends from the 1990s.
- Modified Mann-Kendall performs better than the original Mann-Kendall test.

INTRODUCTION

West Africa have been ascribed with adverse climate change impacts. In past decades, the region experienced decline in food security due to warming, changing precipitation patterns, and greater frequency of some extreme events (IPCC 2019). Climate change has driven decreased discharge and increased drought in the Sahel since 1970, with observations showing that 1984 is the driest year on record (Biasutti 2019). High intensity rainfall and flood magnitudes were projected to increase in coming decades (Sylla *et al.* 2015; Aich *et al.* 2016). An increasing trend for annual rainfall-runoff erosivity and soil loss is expected in the 21st century (Amanambu *et al.* 2019). Water resources are fundamental for several sectors such as hydropower, crop production and fisheries (Roudier *et al.* 2014). Sylla *et al.* (2018) disclosed that increase in temperature will lead to decrease in the potential to sustain large dams and irrigated agriculture in West Africa.

The Niger basin is ascribed as having poorly documented historical hydrological data. There has been a decrease in the amount of reliable rainfall stations since 1980 (Ali & Lebel 2009; Oyerinde *et al.* 2015) and discharge stations since 2000 (Schröder *et al.* 2019). This has been identified as due to underfunding of data collection agencies, lack of technical capacity and commitment, inaccessibility of remote gauge stations due to logistical and security challenges, and equipment malfunction (Ekeu-Wei *et al.* 2018). Radar altimetry measurements were found to aid in improving observed discharge data but generating reliable altimetry-discharge rating curves is still unresolved (Schröder *et al.* 2019). Temporal resolution of radar altimetry measurements due to satellite passing time also creates challenges, when there is a consecutively gapped hydrological record (Ekeu-Wei *et al.* 2018). This has led to

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY 4.0), which permits copying, adaptation and redistribution, provided the original work is properly cited (<http://creativecommons.org/licenses/by/4.0/>).

insufficient research for development in water resources in West Africa (Vahid *et al.* 2015) and sometimes, contrasting future trends have been reported (Dosio *et al.* 2020); this makes policy making difficult.

Multiple imputation is now accepted as the best general method to deal with incomplete hydrological data (Little 1992; van der Heijden *et al.* 2006; van Buuren & Groothuis-Oudshoorn 2011; Ekeu-Wei *et al.* 2018; Sidibe *et al.* 2018). It was described as the method of choice for complex incomplete data problems (van Buuren & Groothuis-Oudshoorn 2011). Multiple Imputation performed better in filling missing data when compared to other methods such as: complete case analysis, available case methods, least squares on inputted data, maximum likelihood and Bayesian methods (Little 1992; van der Heijden *et al.* 2006). Ekeu-Wei *et al.* (2018) compared the performance of radar altimetry and a multiple imputation technique (MICE) on 5 hydrological stations located in the lower parts of the Niger basin (Nigeria). They concluded that MICE have potentials for ameliorating missing data challenges on the evaluated 5 catchments. These studies highlighted above have failed to assess the potential of multiple imputation across different scales on all parts of the Niger basin. The river basin has different flow regimes from upper, middle and lower parts (Oyerinde *et al.* 2017c) and it covers 10 countries. Therefore, this study assesses the efficacy of the Multiple imputation (MICE algorithm) in filling missing discharge data across different spatial scales on the whole Niger basin. The infilled data were subsequently used to assess complete discharge trends on 22 hydrological stations widely spread across the upper, middle and lower parts of the Niger basin. The objectives of the study are to:

1. Evaluate the efficacy of MICE in improving observed discharge data across different spatial scales on the Niger basin.
2. Estimate missing discharge data on 22 hydrological stations from 1980–2013.
3. Assess the effects of missing discharge data on hydrological trend analysis.

Study area

The Niger River basin is the largest river basin in West Africa and it sustains livelihood of most countries in the Sahel. It covers 2.27 million km², with the active drainage area comprising less than 50% of the total basin (Ogilvie *et al.* 2010). The river has a length of 4,200 km and it is the third longest river in Africa. The basin has a population of over 100 million people based in ten countries (Algeria, Benin, Burkina Faso, Cameroon, Chad, Cote d'Ivoire, Guinea, Mali, Niger and Nigeria). The source of the Niger River is in the mountains of Guinea in an area with very high rainfall. Annual precipitation average over the whole Niger basin is 690 mm/year. This precipitation pattern varies across countries and regions. In the Sahelian parts, annual precipitation is about 280 mm while at Guinea parts precipitation is up to 1,635 mm. The average temperature ranges between 22 °C in the south to 27 °C in the northern parts. The basin topography shows high elevation up to 2,202 meters above sea level (MASL) in the Guinea mountains and lower elevation of 4 MASL at the basin exit into the ocean (Figure 1). Vegetation ranges from evergreen forests in the south to deserts in the Northern parts (Aich *et al.* 2016).

The Niger River flows Northeast from the source through the Upper Niger basin and enters the Inner Delta in Mali. During the rainy season, the delta forms a large flood plain of 20,000–30,000 km², facilitating the cultivation of rice, cotton and wheat as well as cattle herding and fishing (KfW 2010). The size of the flooded area is subject to strong annual variations, depending on the discharge of the Upper basin. A large part of the water is lost in the delta due to evaporation and seepage. Its main tributary, the Benue River, flows from highlands of Cameroon and joins the Niger at Lokoja, Nigeria, before reaching the Atlantic Ocean at the Gulf of Guinea (Oguntunde & Abiodun 2013). The Niger has an annual average flow of 1,005.83 m³/s (average 1980–2013) at Koulikoro (Mali) and up to 5,000 m³/s (average 1980–2013) close to the basin exit at Lokoja, Nigeria (Figure 1). The World Bank estimates that 30,000 gigawatt hours could be generated in the Niger River and its tributaries, but only 6,000 gigawatt hours have been developed so far. The Kainji Hydroelectric PLC (Figure 1) generates 22% of total hydroelectricity (KfW 2010). There is potential for increasing hydropower generation in the Niger basin.

Data

Daily river discharge data used in the study was obtained from the Niger River Basin Authority (NBA). We got data for 22 stations widely spread across the Niger River basin from 1920 to 2013 (Figure 1). As shown in Table 1 and Figure 2, all the evaluated 22 hydrological stations were established at different times. Two stations

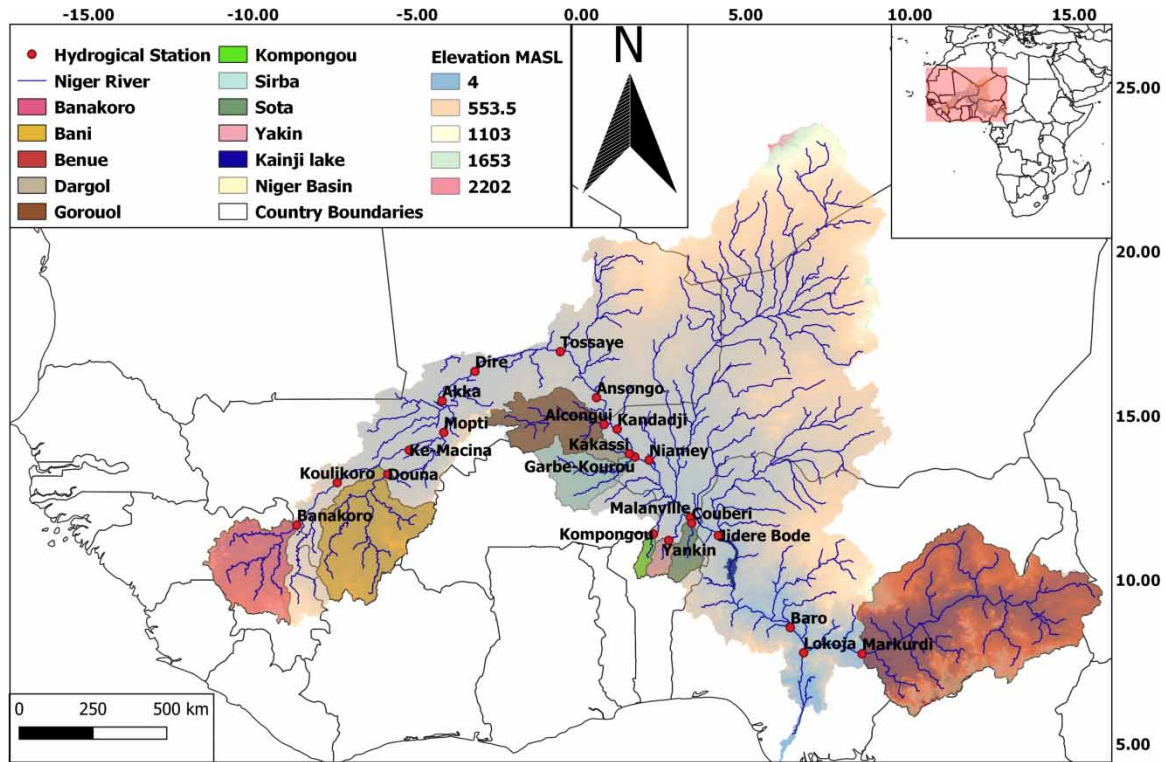


Figure 1 | Spatial location of the 22 hydrological stations on the Niger basin.

Table 1 | Length of available discharge data

S/N	Stations	Start	End
1	Koulikoro	1921	2013
2	Douna	1923	2005
3	Ansongo	1951	2013
4	Couberi	1952	2013
5	Kompongou	1952	2013
6	Mopti	1952	2013
7	Taoussa	1952	2013
8	Yankin	1952	2013
9	Malanville	1953	2013
10	KeMacina	1954	2013
11	Akka	1961	2007
12	Dire	1961	2013
13	Banakoro	1968	2013
14	Alkongui	1980	2013
15	Baro	1980	2013
16	Garbey kourou	1980	2013
17	Jidere	1980	2013
18	Kakassi	1980	2013
19	Kandadji	1980	2011
20	Lokoja	1980	2013
21	Makurdi	1980	2013
22	Niamey	1980	2013

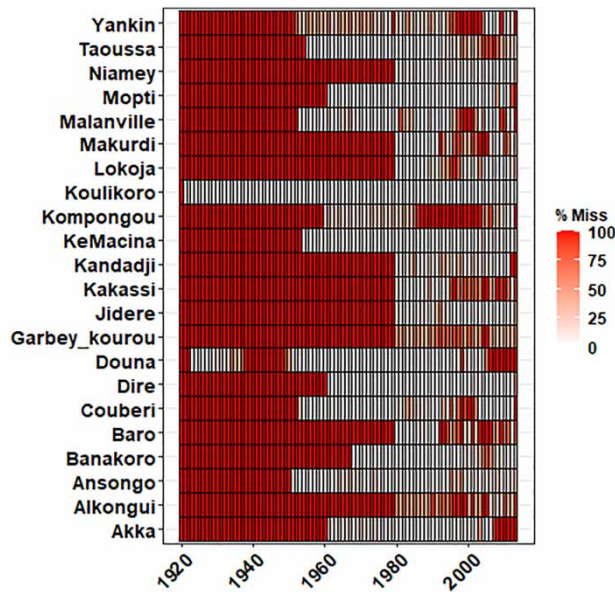


Figure 2 | Yearly percentage missing data on the 22 river discharge stations from 1920–2013.

(Koulikoro and Dire) have data records since the 1920s, eight stations started in the 1950s, three stations were established in the 1960s while nine stations have records since the 1980s. Clear visual assessments of intra and inter annual data quality shows most hydrological stations have good data from the 1980s (Figure 2). Thus, we chose the period of 1980–2013 for this study.

METHODS

MICE algorithm

The MICE algorithm was implemented in the R package MICE (van Buuren & Groothuis-Oudshoorn 2011). The multivariate imputation process involves three main steps: imputation, analysis and pooling, which are well described by van Buuren & Groothuis-Oudshoorn (2011), Azur *et al.* (2011), and Sidibe *et al.* (2018). The method has been found to work well in varieties of hydrological applications and to perform better than other methods (Little 1992; Ekeu-Wei *et al.* 2018; Sidibe *et al.* 2018). In line with the study of Sidibe *et al.* (2018), missing values were estimated using the Predictive Mean Matching (PMM) approach. The missing data were simulated multiple times – in this case, five times, which is considered sufficient from the study of Ekeu-Wei *et al.* (2018).

The gap filled discharge data Y is a partially observed random sample from the p -variate multivariate distribution $P(Y|\theta)$. We assume that the multivariate distribution of Y is completely specified by θ , a vector of unknown parameters. The MICE algorithm obtains the posterior distribution of θ by sampling iteratively from conditional distributions of the form

$$P(Y_1|Y_{-1}, \theta_1) \quad (1)$$

⋮

$$P(Y_p|Y_{-p}, \theta_p) \quad (2)$$

The parameters $\theta_1, \dots, \theta_p$ are specific to the respective conditional densities and are not necessarily the product of a factorization of the ‘true’ joint distribution $P(Y|\theta)$. Starting from a simple draw from observed marginal distributions, the t^{th} iteration of chained equations is a Gibbs sampler that successively draws through its relation with other variables, and not directly. Convergence can therefore be quite fast, unlike many other MCMC methods. The name chained equations refers to the fact that the MICE algorithm can be easily implemented as a concatenation of univariate procedures to fill out the missing data (van Buuren & Groothuis-Oudshoorn 2011).

Calibration and validation of MICE gap filling method

MICE gap filling method was calibrated and validated at three discharge stations (Koulikoro, Dire and KeMacina). The three stations were selected because they have less than 5% missing data from 1980–2013 (Figure 3). The average amount of missing data on the 22 discharge stations was calculated as 27%. The same amount of missing data was artificially generated into the three discharge stations (Figure 4). Twenty percent discontinuous and random missing data were generated throughout the 3 discharge time series as shown in Figure 4. The remaining 7% missing gap was added through a continuous means from 1992–1994. Calibration was done by comparing the observed and inputted discharge data during the continuous missing years (1992–1994). Observed discharge data and Gap filled discharge data for the whole time series from 1980 to 2013 was used in data validation. Three efficiency metrics described below were used as an indicator of agreement between observed discharge and inputted discharge. The 3 metrics have been previously used in the Niger basin (Oyerinde *et al.* 2016, 2017b; Oyerinde & Diekkrüger 2017; Poméon *et al.* 2018).

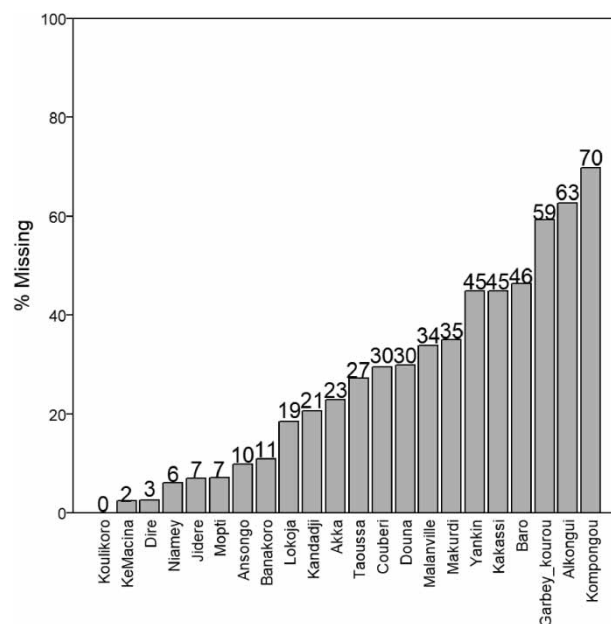


Figure 3 | Percent missing data of 22 river discharge stations from 1980–2013.

- (a) **Nash-Sutcliffe Efficiency** ($-\infty < NSE \leq 1$) (Nash & Sutcliffe 1970) (NSE) is commonly used to assess the predictive power of river discharge. It is defined as:

$$NSE = 1 - \frac{\sum_{i=1}^n (O_i - S_i)^2}{\sum_{i=1}^n (O_i - \bar{O})^2} \quad (3)$$

Where O is the observed value and S is the predicted value at day i .

An efficiency of 1 corresponds to a perfect match between predicted and observations.

- (b) **Kling-Gupta Efficiency (KGE)** was developed by Gupta *et al.* (2009) to provide a diagnostically interesting decomposition of the NSE, which facilitates the analysis of the relative importance of its different

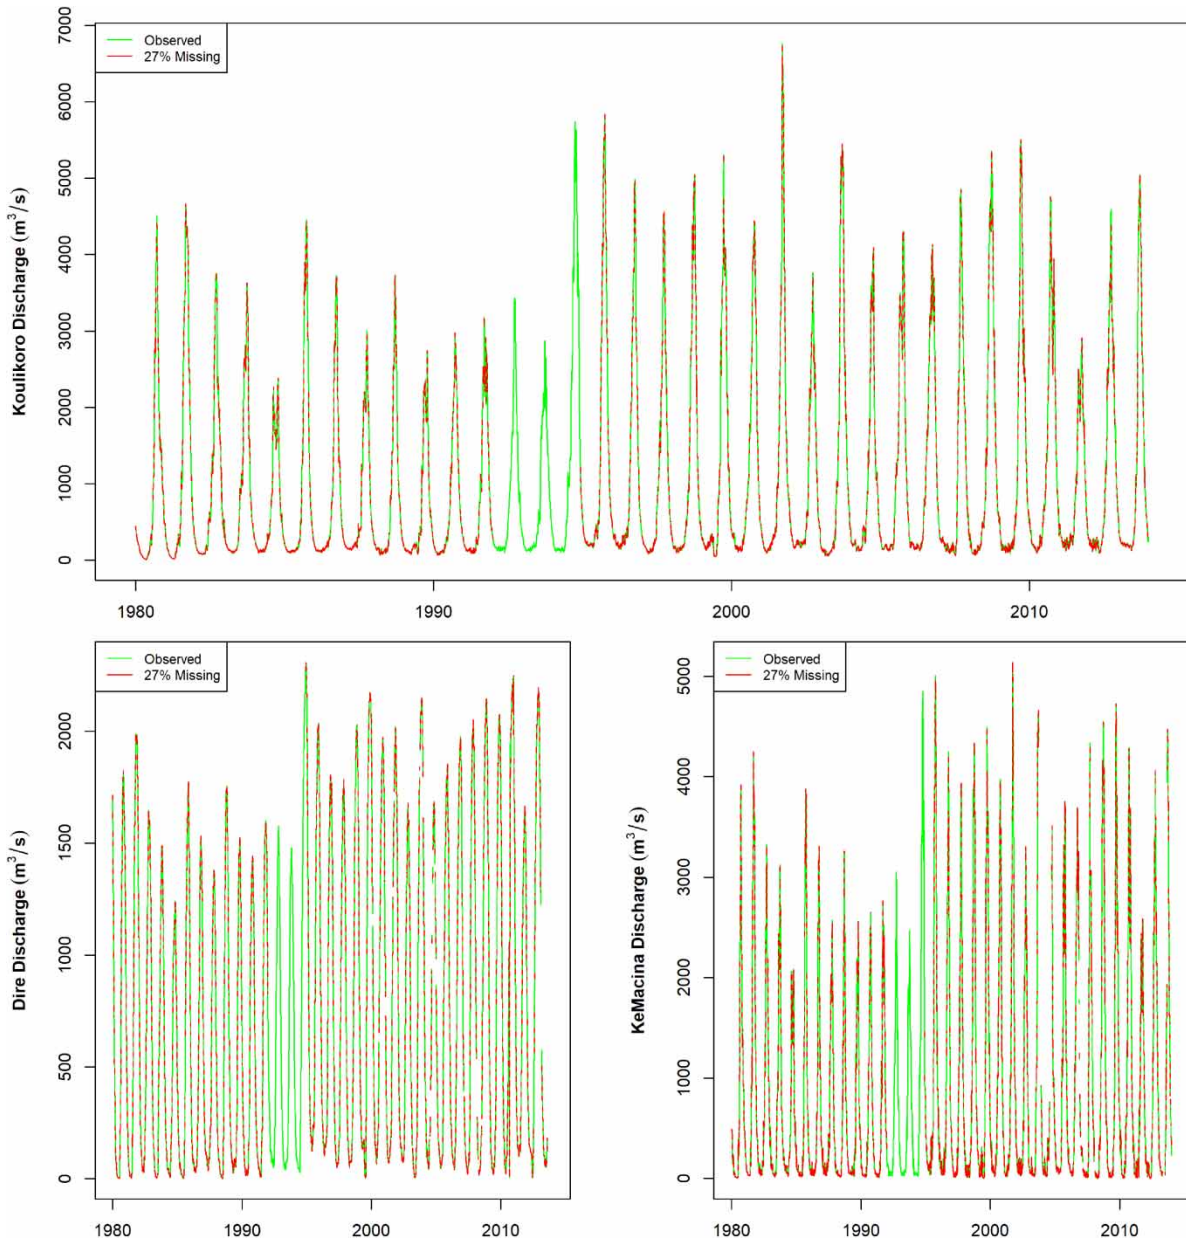


Figure 4 | Observed vs 27% generated missing data at the three discharge stations.

components (correlation, bias and variability) in the context of hydrological modeling (Kling *et al.* 2012).

$$KGE = 1 - \sqrt{(r - 1)^2 + (\beta - 1)^2 + (\gamma - 1)^2} \tag{4}$$

$$\beta = \frac{\mu_s}{\mu_o} \tag{5}$$

$$\gamma = \frac{CV_s}{CV_o} \tag{6}$$

r is the correlation coefficient between predicted and observed discharge (dimensionless), β is the bias ratio (dimensionless), γ is the variability ratio (dimensionless), μ is the mean discharge in m^3/s , CV is the coefficient of variation (dimensionless). The KGE has its optimum at unity (Kling *et al.* 2012).

(c) **Volumetric Efficiency (VE)** was proposed in order to circumvent some problems associated with the NSE, which is not sensitive to differences in absolute discharge values. It represents the fraction of water delivered at the proper time; its complement represents the fractional volumetric mismatch (Criss & Winston 2008).

$$VE = 1 - \frac{\sum_{i=1}^n |S_i - O_i|}{\sum_{i=1}^n O_i} \quad (7)$$

Flow duration curves (FDC)

To evaluate the performance of the gap filling method, FDC was done at a daily timestep between observed data and filled data. FDC have been widely applied in hydrological studies (Kling *et al.* 2012; Onyutha & Willems 2013; Abadzadesahraei & Sui 2016; Burgan & Aksoy 2020). It represents the relationship between the magnitude and frequency of daily, monthly (daily in this article) streamflow for a particular river basin. It provides an estimate of the percentage of time a given streamflow was equaled or exceeded over a historical period. FDC was used to provide a simple, yet comprehensive, graphical view of the overall historical variability associated with streamflow in a river basin. It is the complement of the cumulative distribution function (cdf) of daily streamflow. Each value of discharge Q has a corresponding exceedance probability p , and an FDC is simply a plot of the p th quantile or percentile of daily streamflow versus exceedance probability p , where p is defined by:

$$p = 1 - P\{Q \leq q\} \quad (8)$$

$$P = 1 - F_Q(q) \quad (9)$$

Trend analysis

Mann-Kendall test (MK)

To analyze for increasing/decreasing trends of river discharge, the Mann-Kendall test was employed. Mann-Kendall test evaluates the relative magnitudes of data trend and it is widely used in hydrology (Verstraeten *et al.* 2006; Meusburger *et al.* 2012; N'Tcha M'Po *et al.* 2017; Oyerinde *et al.* 2017a). The advantage of this test is that the data need not comply with any particular distribution. Mann-Kendall statistic (S) was computed as:

$$S = \sum_{k=1}^{n-1} \sum_{j=R+1}^n \text{sign}(x_j - x_k) \quad (10)$$

$$\begin{cases} \text{sign}(x_j - x_k) = 1 & \text{if } x_j - x_k > 0 \\ \text{sign}(x_j - x_k) = 0 & \text{if } x_j - x_k = 0 \\ \text{sign}(x_j - x_k) = -1 & \text{if } x_j - x_k < 0 \end{cases} \quad (11)$$

where x_j and x_k are the annual values in years j and k , respectively and n is the number of years.

For an independent data sample without tied values, the mean and variance of S are given by:

$$E[S] = 0 \quad (12)$$

$$\text{Var}(S) = \frac{n(n-1)(2n+5)}{18} \quad (13)$$

If tied values are present in the sample, $\text{Var}(S)$ is computed by:

$$\text{Var}(S) = \left[n(n-1)(2n+5) - \sum_{i=1}^n t_i(i-1)(2i+5) \right] / 18 \quad (14)$$

Then, the MK test statistic Z for all those cases where n is larger than 10 is given by:

$$Z = \begin{cases} \frac{S-1}{\sigma} & \text{if } S > 0 \\ 0 & \text{if } S = 0 \\ \frac{S+1}{\sigma} & \text{if } S < 0 \end{cases} \quad (15)$$

The trend was dignified as “no trend” when the change is not significant, ‘an increasing or a decreasing trend’ when S is positive or negative, respectively. Similarly, if $Z > 0$, it indicates an increasing trend, and vice versa.

Modified Mann-Kendall test by variance correction (MMK)

Study of [Yue & Wang \(2004\)](#) demonstrated that serial correlation in time series alters the variance of the MK statistic. Their study was able to use modification of variance to limit the effect of serial correlation. In addition, [Chen et al. \(2016\)](#) recommended the combined use of the MK and MMK tests when there are autocorrelations above lag 1. Due to these reasons, we assessed and compared the autocorrelation of observed and gap-filled discharge data. The results of the MK statistics before and after variance corrections of gap-filled data by MMK were also compared. Modified variance $V(S)^*$ for computing the MK statistic Z is calculated as:

$$V(S)^* = V(S) \cdot \frac{n}{n^*} \quad (16)$$

where n is the actual sample size of actual sample data, n^* is the effective sample size, and n/n^* is termed the correction factor.

Sen’s slope

Besides the magnitude of a time series, trend was evaluated by a simple non-parametric procedure developed by Sen ([Sen 1968](#); [Ali et al. 2019](#)). The trend is calculated by:

$$\beta = \text{Median} \left(\frac{x_j - x_i}{j - i} \right), \quad j > i \quad (17)$$

where β is Sen’s slope estimate. $\beta > 0$ indicates an upward trend in a time series. Otherwise the data series presents a downward trend during the time period ([Ali et al. 2019](#)).

Pettit test

To evaluate the difference between the cumulative distribution function before and after a time instant (K), the Pettit test was applied. The Pettit test detects any significant change in the mean value in a time series ([Kliment et al. 2011](#)). The non-parametric Pettit rank test was reported to have good capabilities in handling outliers ([Pettitt 1979](#); [Verstraeten et al. 2006](#)) and it was previously used in hydrological studies in the region ([Nka et al. 2015](#); [Oyerinde et al. 2017a](#)). The significance of the analyzed trends in the dataset was tested at probability level $p \leq 0.05$ to show 99.5% experimental precision. It tests the H_0 : the T variables follow one or more distributions that have the same location parameter (no change), against the alternative: a change point exists. The non-parametric statistic is defined as:

$$K_T = \max |U_{t,T}| \quad (18)$$

where:

$$U_{t,T} = \sum_{i=1}^t \sum_{j=t+1}^T \text{sgn}(X_i - X_j) \quad (19)$$

The change-point of the series is located at K_T , provided that the statistic is significant.

Table 2 | Efficiency metrics during calibration and validation of MICE gap filling method

	Calibration (missing years 1992–1994)			Validation (all the time series from 1980–2013)		
	Koulikoro	Dire	KeMacina	Koulikoro	Dire	KeMacina
NSE	0.94	0.99	0.94	0.99	0.99	0.99
KGE	0.96	0.98	0.94	0.99	1.00	0.99
VE	0.82	0.93	0.80	0.96	0.98	0.96

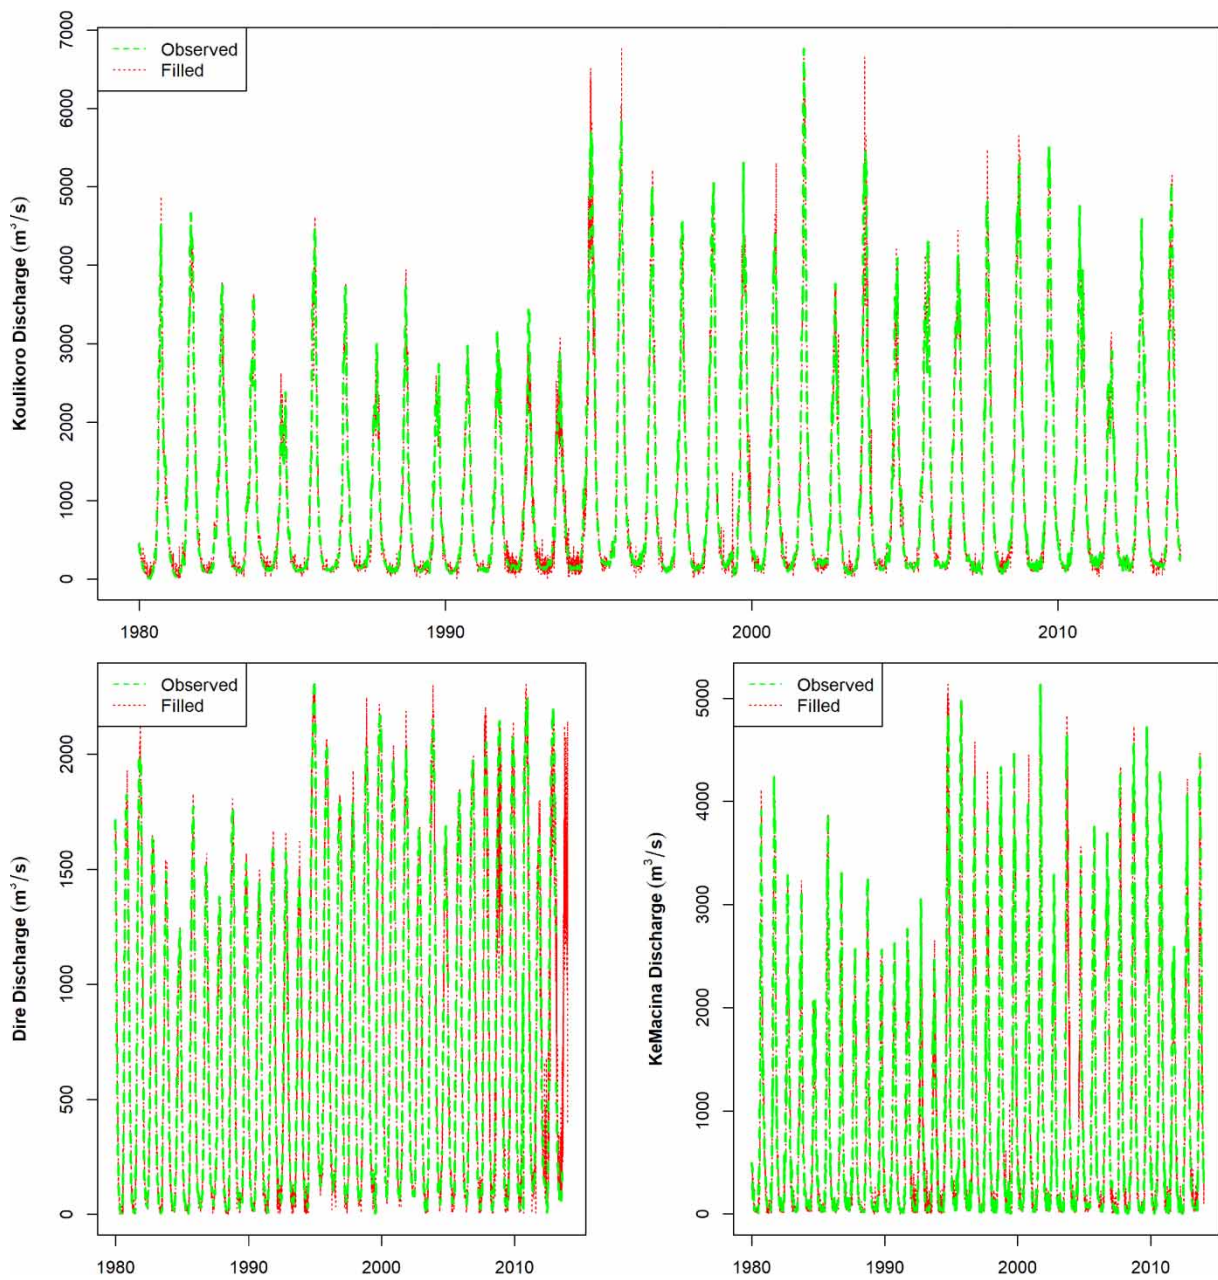


Figure 5 | Complete vs. filled data at the 3 discharge stations.

RESULTS

Calibration and validation of MICE gap filling method

The MICE gap filling method was evaluated at three discharge stations (Koulikoro, KeMacina and Dire), which had less than 5% missing data (Figure 3). There was high efficiency metrics between the inputted data and observed data during both continuous missing years (1992–1994) and the randomly created missing data in all the time series from 1980 to 2013 (Table 2).

From Figure 5, visual assessments show that the MICE gap filling method well reproduced the observed seasonality of flow at the three discharge stations. The observed low and high flows were well reproduced in the gap filled discharge data.

Flow duration curves (FDC)

FDCs were plotted for all the 22 hydrological stations to show the fitness between the gap-filled and observed discharge data (Figures 6–8). The FDC of inputted and observed data nearly indicated a perfect fit at all stations. Figure 6 present FDCs that shows good fitness of observed and inputted data at selected stations on the main Niger River at the Upper parts (Banakoro (11% missing data)), Inland Delta parts at Mopti (7% missing data), Middle parts at Malanville (34% missing data) and the lower parts at Lokoja (19% missing data). From Figure 7,

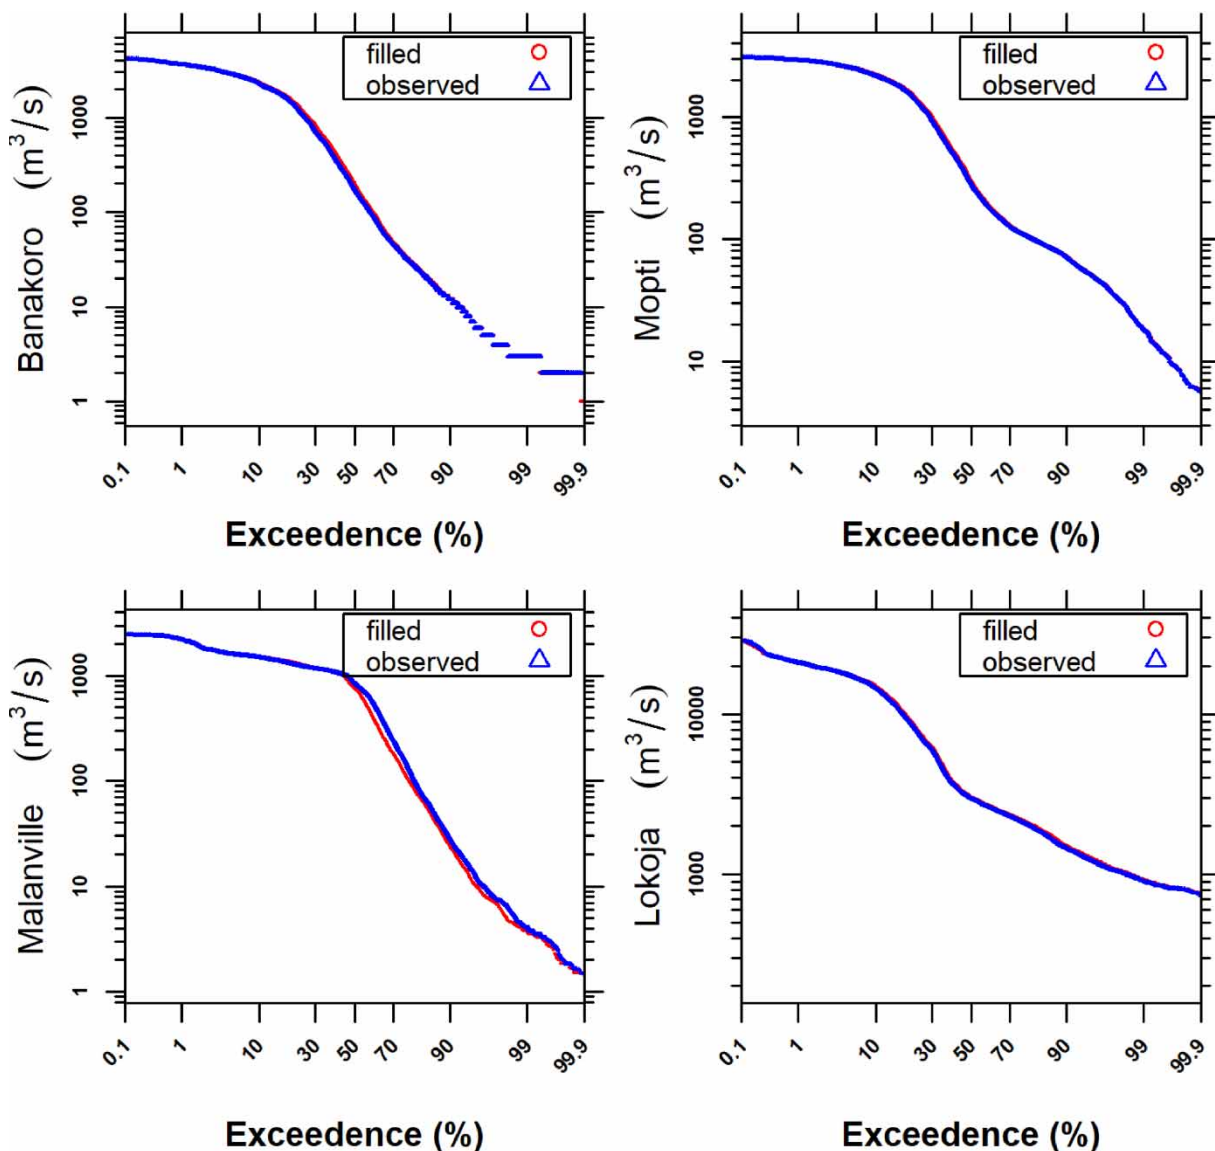


Figure 6 | Comparison of FDC of Filled and observed discharge at selected stations on the Main Niger River.

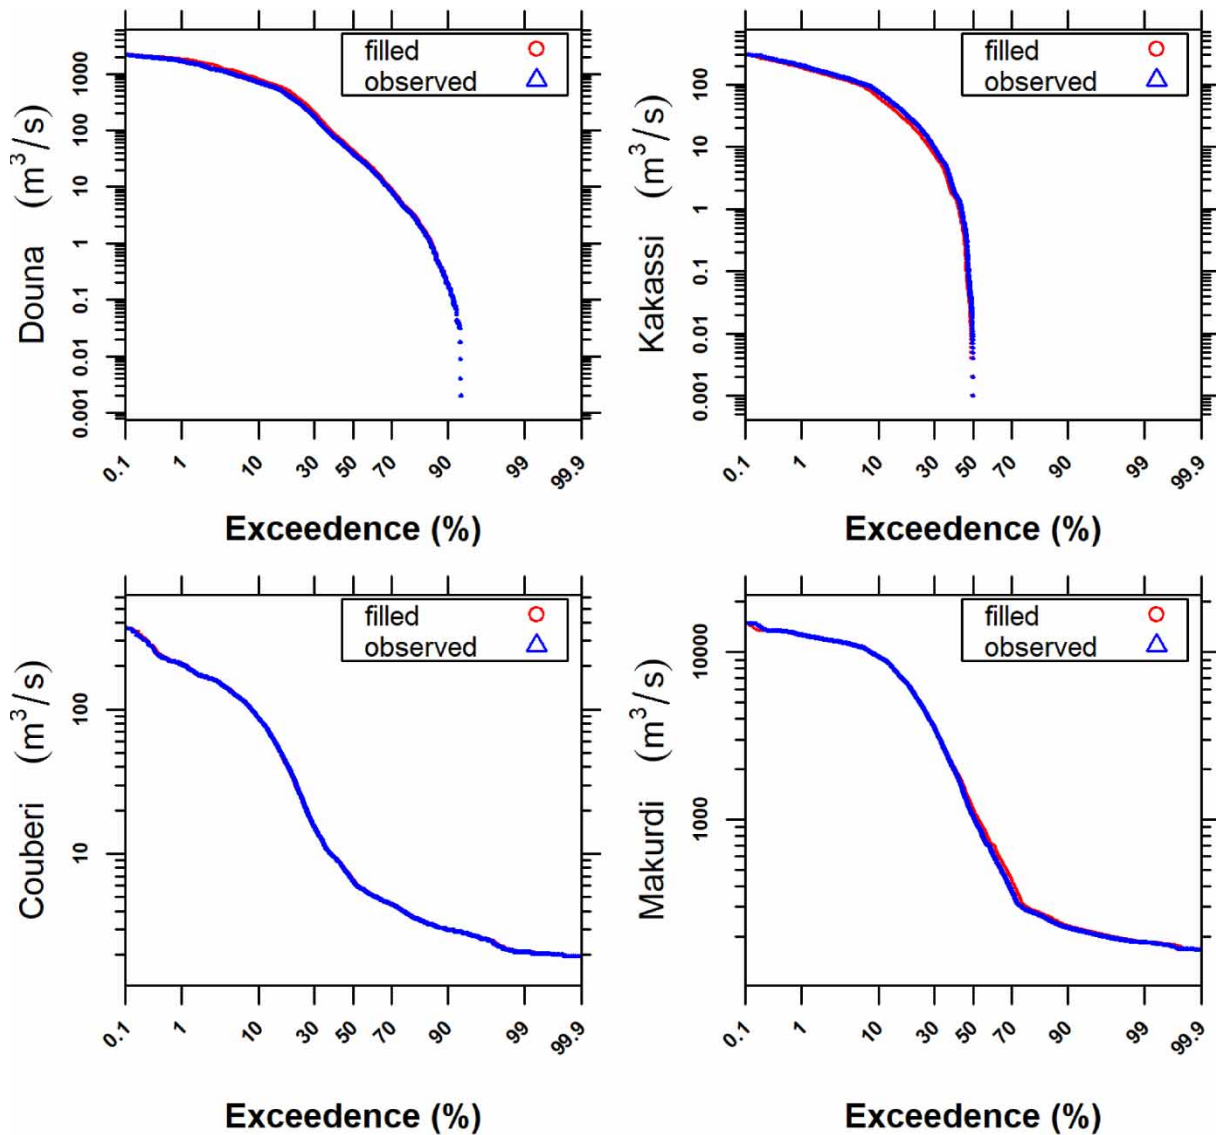


Figure 7 | Comparison of FDC of Filled and observed discharge at selected tributaries of the Niger River.

there was an excellent fit between the FDC of inputted and observed discharge data at selected head water catchments at Couberi (30% missing data), Makurdi (35% missing data), Douna (30% missing data) and Kakassi (45% missing data). We assessed the FDC of four hydrological stations with highest percentage of missing data as shown in Figure 8 (Kompongou (72% missing data), Garbey Kourou (50% missing data), Baro (46% missing data) and Alkongui (63% missing data)). The pattern of flow of the observed was adequately reproduced by the inputted, although there was slight over estimation at Baro while slight underestimation was observed at Kompongou, Garbey Kourou and Alkongui.

Discharge trends

Figure 9 shows the autocorrelation plots for filled and observed discharge data of the 22 catchments using lags 1 to 10. Observed discharge data has very high autocorrelation values that range from 0.67 to 1.00 for all the 22 discharge stations. The gap-filled data however had decreased and more diverse autocorrelation values (−0.2 to 0.77). We compared the MK tests statistics before and after filling the missing data (Table 3). Missing data decreased the magnitude of S and Z statistics due to decreased sample size while this problem was corrected in the gap-filled MK test. Sen's slope p value indicates that six discharge stations with high amounts of missing data (Alkongui (63%), Banakoro (11%), Couberi (30%), Douna (30%), Kompongou (70%) and Makurdi (35%)) show no significant trend

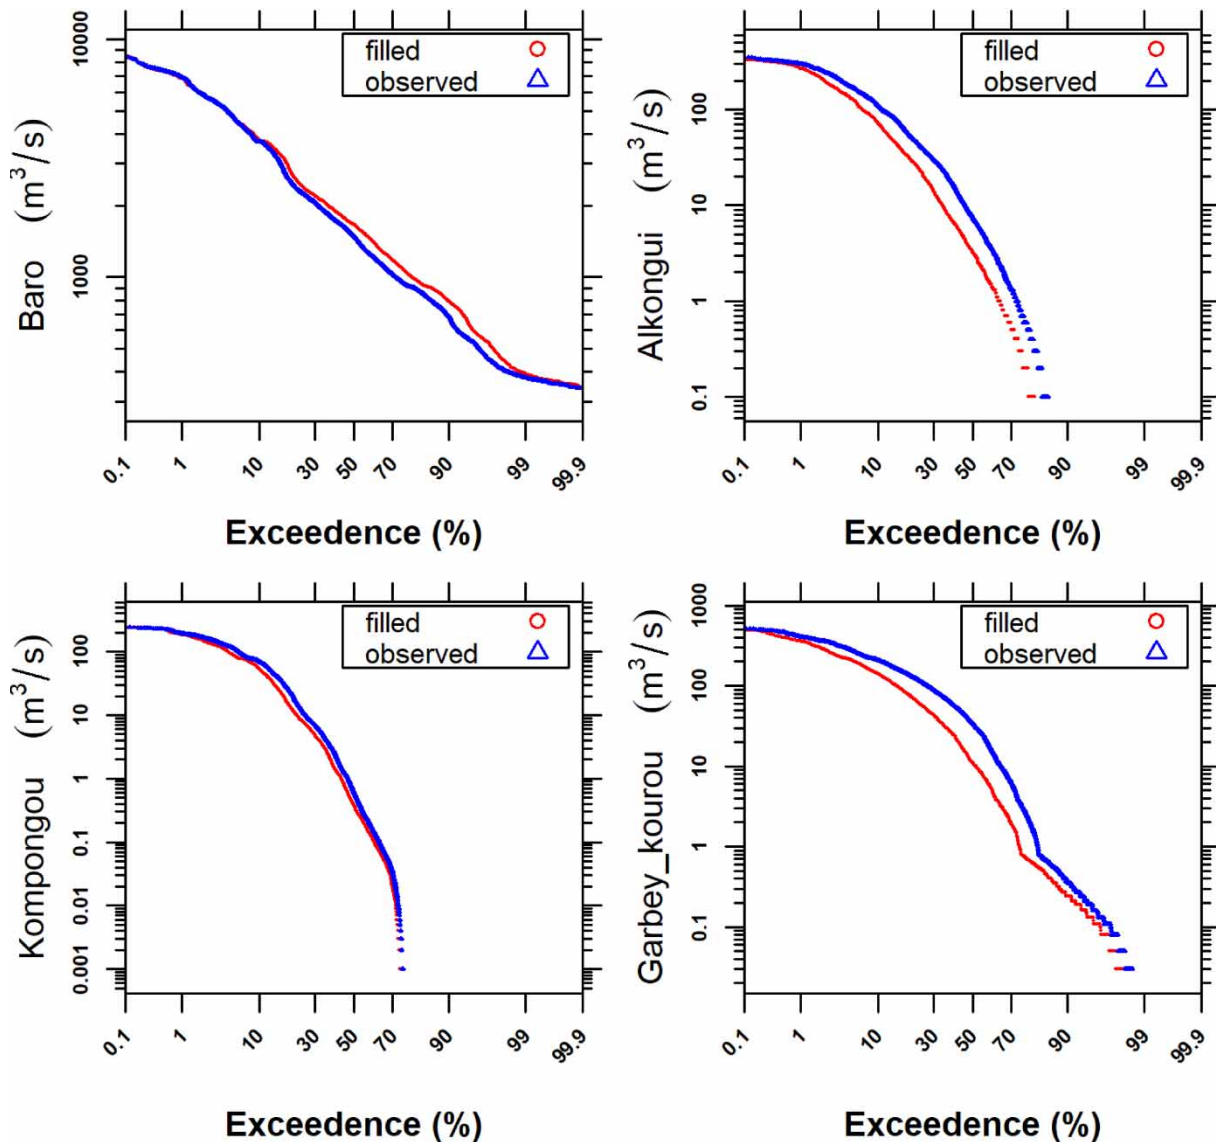


Figure 8 | Comparison of FDC of filled and observed discharge at stations with the highest amount of missing data.

before gap filling. However, all the six catchments show significant increases after gap filling. The significant levels and magnitude of the Sen's slope were improved across all 22 catchments after gap filling.

We compared results obtained from MK and MMK tests on gap-filled data of the 22 catchments and the results are shown in Table 4. MMK made substantial improvement of the Z and variance. The MK has a problem with variance computation due to autocorrelation after gap filling (Figure 9). Constant variance value of 4550.33 was computed by MK across the 22 stations while MMK was able to correct the problem.

A rapidly increasing trendline was observed in the graphical presentation shown in Figure 10. Pettit tests presented in Table 5 show that all the 22 catchments witnessed significant increasing river discharge with break points of 14 catchments in 1993, four catchments had breaks in 1994, three catchments in 1997 and one in 1987 (Table 5).

Figure 11 presents the spatial map of the Sen's slope for 22 stations in the Niger basin after gap filling. Most (15) of the discharge stations showed significant increasing discharge at $p \leq 0.001$. Five discharge stations have been increasing since 1980s at $p \leq 0.01$ while two stations increased at $p \leq 0.05$.

DISCUSSION

The study shows that missing data is a major challenge in the Niger basin. Twenty-one discharge stations have missing values and incomplete records. This was due to the earlier discussed observed decrease in rainfall and

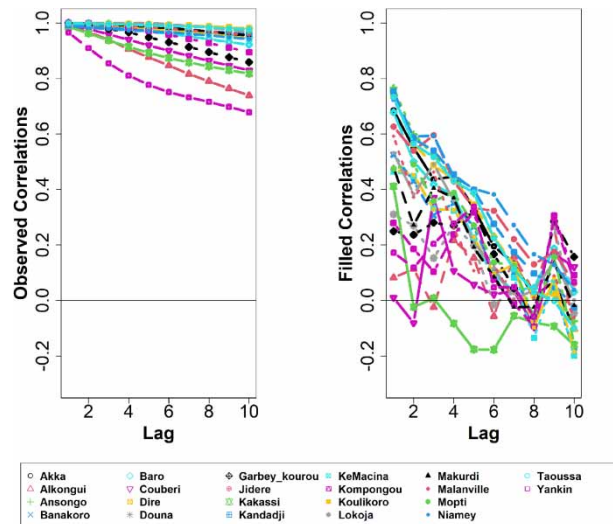


Figure 9 | Auto-correlation (ACF) Plots of the observed and gap-filled discharge data.

Table 3 | Effects of missing data on Man-Kendall (MK) and Sen’s slope statistics

Trend tests Test statistics	Observed					Filled				
	MK test		Sen’s slope			MK test		Sen’s slope		
	S	Z	sen.slope	p.value	Sig.Level	S	z	sen.slope	p.value	Sig.Level
Akka	134	2.63	14.28	8.6E-03	0.01	237	3.50	13.13	4.7E-04	0.001
Alkongui	46	0.84	0.32	4.0E-01	NS	177	2.61	0.51	9.1E-03	0.01
Ansongo	231	3.41	13.39	6.5E-04	0.001	277	4.09	11.25	4.3E-05	0.001
Banakoro	59	0.86	4.58	3.9E-01	NS	141	2.08	7.80	3.8E-02	0.05
Baro	133	2.91	62.99	3.6E-03	0.01	305	4.51	43.25	6.6E-06	0.001
Couberri	103	1.82	0.52	6.9E-02	NS	189	2.79	0.51	5.3E-03	0.01
Dire	215	3.17	10.01	1.5E-03	0.01	253	3.74	10.58	1.9E-04	0.001
Douna	41	0.88	2.95	3.8E-01	NS	207	3.05	5.77	2.3E-03	0.01
Garbey_kourou	168	2.71	1.80	6.8E-03	0.01	219	3.23	1.20	1.2E-03	0.01
Jidere	209	3.08	13.24	2.0E-03	0.01	271	4.00	16.23	6.3E-05	0.001
Kakassi	203	3.60	1.09	3.1E-04	0.001	225	3.32	0.56	9.0E-04	0.001
Kandadji	202	3.26	10.80	1.1E-03	0.01	285	4.21	11.67	2.6E-05	0.001
KeMacina	171	2.52	9.79	1.2E-02	0.05	185	2.73	10.89	6.4E-03	0.01
Kompongou	24	0.95	0.62	3.4E-01	NS	223	3.29	0.47	1.0E-03	0.001
Koulikoro	191	2.82	12.32	4.9E-03	0.01	191	2.82	12.32	4.9E-03	0.01
Lokoja	191	2.82	87.71	4.9E-03	0.01	261	3.85	83.51	1.2E-04	0.001
Makurdi	95	1.68	46.03	9.4E-02	NS	221	3.26	31.03	1.1E-03	0.01
Malanville	117	1.97	10.59	4.9E-02	0.05	245	3.62	11.92	3.0E-04	0.001
Mopti	128	1.97	8.70	4.9E-02	0.05	227	3.35	11.52	8.1E-04	0.001
Niamey	305	4.51	12.19	6.6E-06	0.001	317	4.68	13.38	2.8E-06	0.001
Taoussa	221	3.26	18.73	1.1E-03	0.01	253	3.74	9.62	1.9E-04	0.001
Yankin	100	2.31	1.13	2.1E-02	0.05	227	3.35	0.70	8.1E-04	0.001

discharge observation stations in West Africa (Lebel & Ali 2009; Schröder *et al.* 2019). The problem of missing data often hinders precise forecast of extreme events and sustainable policy interventions. Ekeu-Wei *et al.* (2018) disclosed that incomplete hydrological data hinders flood management in many developing regions. Researchers

Table 4 | Comparison of Man-Kendall (MK) and modified Man-Kendall (MMK) tests for the 22 discharge stations

	N/N*	MK Z	MMK Z	MK variance	MMK variance
Akka	2.21	3.50	2.35	4,550.33	10,053.99
Alkongui	0.64	2.61	3.27	4,550.33	2,899.36
Ansongo	3.44	4.09	2.21	4,550.33	15,641.67
Banakoro	2.18	2.08	1.41	4,550.33	9,908.12
Baro	1.65	4.51	3.51	4,550.33	7,496.05
Couberi	0.71	2.79	3.30	4,550.33	3,245.08
Dire	2.85	3.74	2.21	4,550.33	12,947.53
Douna	1.07	3.05	2.96	4,550.33	4,854.94
Garbey kourou	0.76	3.23	3.71	4,550.33	3,445.16
Jidere	1.53	4.00	3.23	4,550.33	6,971.60
Kakassi	2.25	3.32	2.21	4,550.33	10,260.67
Kandadji	2.90	4.21	2.47	4,550.33	13,201.15
KeMacina	1.69	2.73	2.10	4,550.33	7,708.06
Kompongou	0.94	3.29	3.40	4,550.33	4,262.18
Koulikoro	1.72	2.82	2.15	4,550.33	7,835.35
Lokoja	1.26	3.85	3.43	4,550.33	5,732.18
Makurdi	1.53	3.26	2.64	4,550.33	6,948.59
Malanville	1.92	3.62	2.61	4,550.33	8,736.60
Mopti	1.34	3.35	2.89	4,550.33	6,103.43
Niamey	2.18	4.68	3.17	4,550.33	9,927.89
Taoussa	3.44	3.74	2.02	4,550.33	15,635.95
Yankin	0.66	3.35	4.12	4550.33	3,015.10

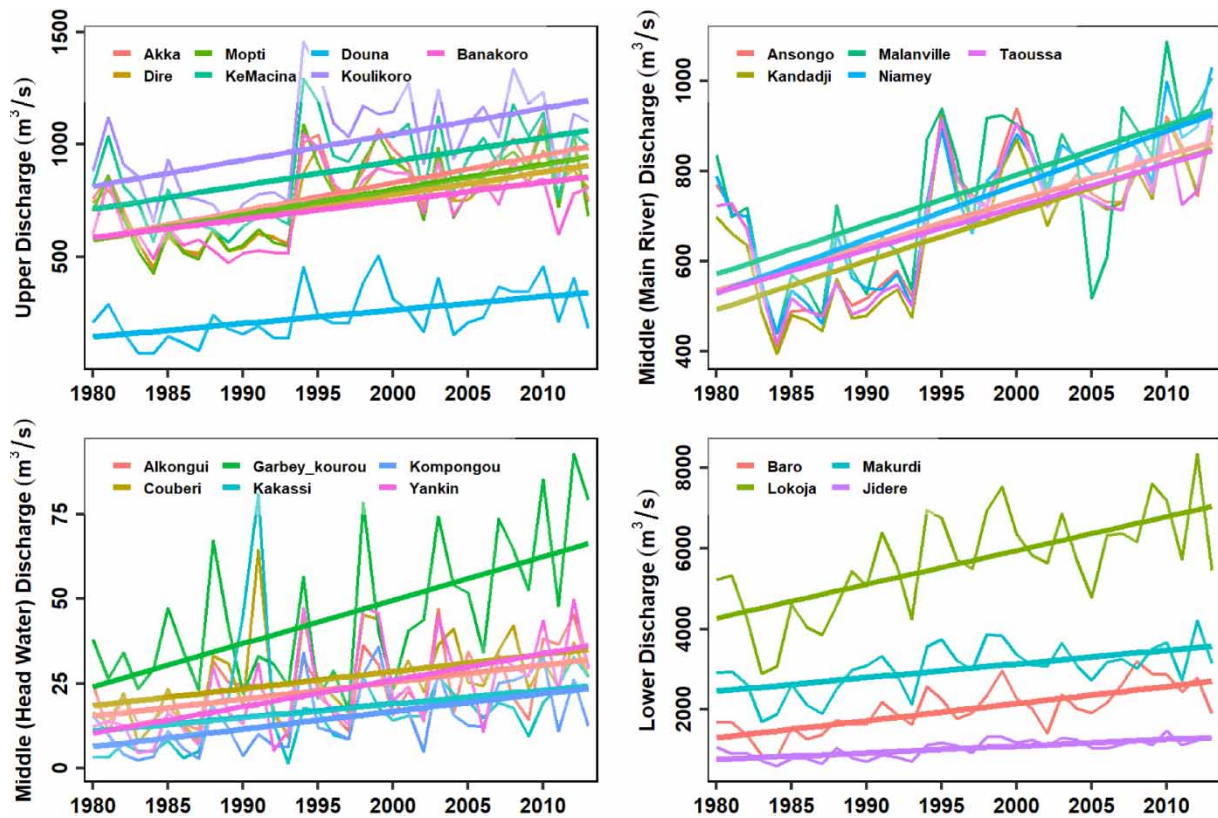


Figure 10 | Annual mean discharge trends at 22 stations of the Niger basin.

Table 5 | Results of the Pettit test for the 22 discharge stations

S/N	Stations	K	P	Significant Levels	n
1	Akka	1993	7.59E-05	0.001	34
2	Alkongui	1997	4.49E-02	0.05	34
3	Ansongo	1994	4.37E-05	0.001	34
4	Banakoro	1993	1.89E-04	0.001	34
5	Baro	1993	2.53E-04	0.001	34
6	Couberi	1993	1.64E-02	0.05	34
7	Dire	1993	4.04E-05	0.001	34
8	Douna	1993	1.98E-03	0.01	34
9	Garbey kourou	1997	2.89E-03	0.01	34
10	Jidere	1993	5.55E-05	0.001	34
11	Kakassi	1987	8.45E-03	0.01	34
12	Kandadji	1994	2.29E-05	0.001	34
13	KeMacina	1993	4.50E-04	0.001	34
14	Kompongou	1993	2.25E-03	0.01	34
15	Koulikoro	1993	1.40E-04	0.001	34
16	Lokoja	1993	3.38E-04	0.001	34
17	Makurdi	1993	8.98E-04	0.001	34
18	Malanville	1993	8.98E-04	0.001	34
19	Mopti	1993	1.20E-04	0.001	34
20	Niamey	1994	4.37E-05	0.001	34
21	Taoussa	1994	5.13E-05	0.001	34
22	Yankin	1993	4.18E-03	0.01	34

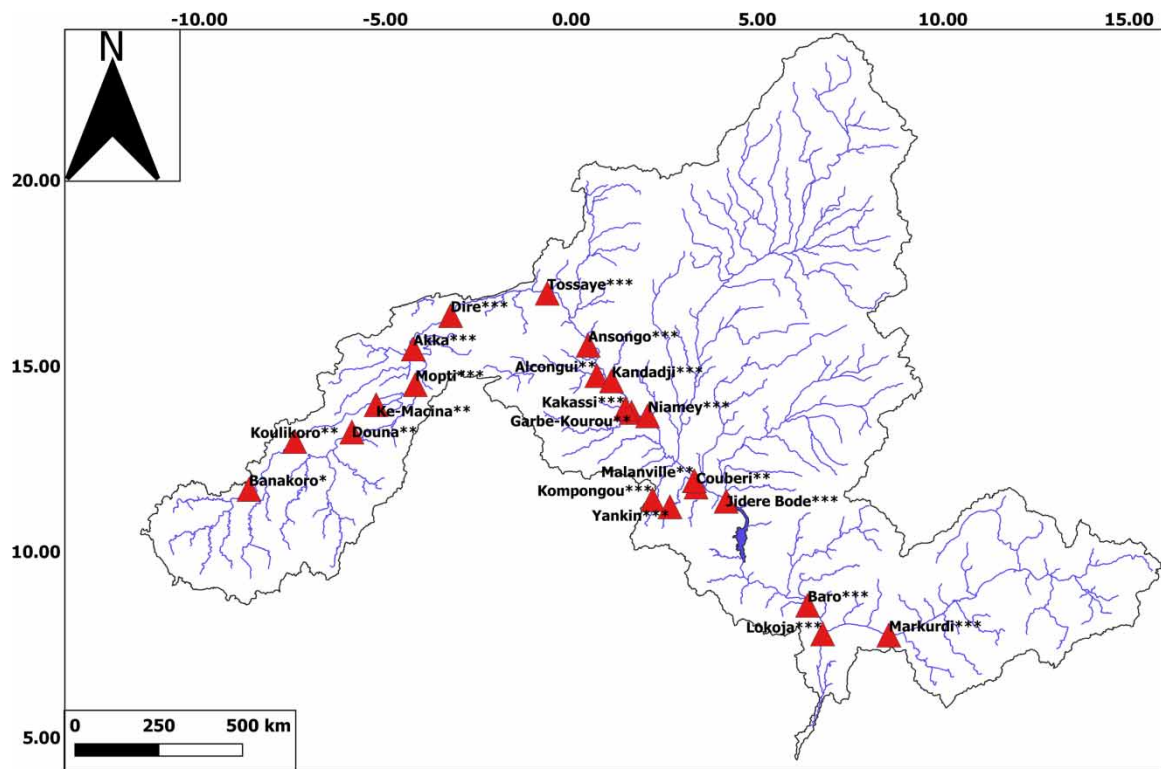


Figure 11 | Spatial Sen’s slope and significant levels; *** Significant at $p \leq 0.001$, ** Significant at $p \leq 0.01$ and * Significant at $p \leq 0.05$.

such as [Badou et al. \(2016\)](#) have to exclude some important locations where inadequate data are recorded. These drives incomplete important information that will be useful for sustainable river basin management.

MICE gap filling method shows promising results for 22 river discharge stations widely spread in the Niger basin. Gap-filled discharge data have high efficiency metrics when compared with observed during both continuous and discontinuous missing discharge time series. These findings are all in agreement with previous studies where MICE was evaluated for filling missing river discharge data ([Little 1992](#); [Ekeu-Wei et al. 2018](#); [Sidibe et al. 2018](#)). [Little \(1992\)](#) reported that the use of regression-based approaches in filling missing data doesn't account for errors in the imputations, thus leading to small standard errors. MICE overcome this challenge by drawing values from the predictive distribution and then repeating complete-data analyses. [Ekeu-Wei et al. \(2018\)](#) found out that MICE outperformed radar altimetry when filling continuous missing data and MICE filled data gives good similarity to natural floods. [Sidibe et al. \(2018\)](#) disclosed that MICE estimate missing data better than the random forest at discharge stations with high amounts of missing data in West and Central Africa. The use of hydrological models in simulating missing discharge data has been promising but poor observed meteorological data required for hydrological model calibration and validation have made setting up such models difficult ([Poméon et al. 2017](#)).

We evaluated the performance of MICE in all 22 catchments by comparing FDC of inputted data with the FDC of observed. There were perfect fits for all the 22 stations evaluated in the river basin and MICE captures both low and high flows on the basin. These will enable MICE-enhanced hydrological records to be applicable in extreme hydrological applications ([Ekeu-Wei et al. 2018](#)). FDC of stations with a high amount of missing data captured the observed river discharge patterns with slight under and over-estimation. This shows that MICE should be applied with precautions in stations with daily missing data percentage that is more than 70%. [Barnes et al. \(2006\)](#) found that small sample size constrains the generalization potential of the MICE, thus resulting in uncertain missing data estimates.

Gap-filling of missing discharge data with MICE decreased autocorrelation and significantly improved the MK statistics and Sen's Slope. The MK test has been reported to perform worse when there is autocorrelation ([Chen et al. 2016](#)). [Yue & Wang \(2004\)](#) have demonstrated that the existence of negative serial correlation will decrease the possibility of rejecting the null hypothesis of no trend. We compared the performance of the MK and MMK statistics and discovered that MK had challenges at variance computation in the Niger basin. This happens because negative serial correlation reduces the variance of the MK statistics, and hence a smaller number of samples falls in the critical regions ([Yue & Wang 2004](#)).

All the 22 discharge stations evaluated in the Niger basin show significant increasing trend since the 1980s with a break point at the 1990s for most of the stations. This result corroborates the findings of [Amogu et al. \(2010\)](#), who attributed the increases in discharge in Sahel catchments to land use changes. [Descroix et al. \(2018\)](#) also attributed the increases in discharge from 1990s in the Sahel to recovery from the great drought of West Africa (1968–1990). The authors also explained that increasing discharge is due to lower soil infiltration rate compared to the pre-drought era ([Bichet & Diedhiou 2018](#); [Descroix et al. 2018](#)). Some authors found direct relationship among the trends in discharge, flood and some extreme rainfall indices ([Nka et al. 2015](#); [Adeyeri et al. 2019](#)). They attributed the rainfall factors as a major factor aggravating increase in runoff coefficients in the Sahelian region ([Nka et al. 2015](#)).

CONCLUSIONS

The challenge of missing discharge data has hindered reliable flow prediction and forecast in West Africa, thus hindering sustainable river basin management. This study assessed the multiple benefits of the MICE gap filling method in ameliorating the challenges posed by high amounts of missing discharge data in the Niger basin. We evaluated the percentage of missing data for 22 discharge stations. The MICE gap-filling method was assessed and used in filling missing data gaps for the discharge stations. It was observed that the basin has a high percentage of missing data across different stations, which has significant impacts on trend analysis. All the discharge stations show high negative autocorrelations before gap filling. Comparison of autocorrelations of the observed and gap filled data reveals gradual reduction in the degree of autocorrelation after gap filling. The performance of the MK and MMK statistics were compared on the gap-filled data and results showed very poor performance of the MK as compared to the MMK due to autocorrelation. Significantly increasing discharge trends were observed in all the

discharge stations after gap filling from 1990s. Further studies should assess the possibility of using MICE to increase the efficiency of hydrological models and decrease modelling uncertainties.

ACKNOWLEDGEMENTS

The research of this article was supported by DAAD within the framework of the Federal Ministry of Education and Research. The authors and publisher are fully responsible for the content. We thank the Niger Basin Authority for providing the hydrological data.

AUTHOR CONTRIBUTIONS

Data collection, running of MICE algorithm, graphics and tables were made by Ganiyu Titilope Oyerinde and Adeyeri Oluwafemi. The post-doctoral study was supervised by Prof. Agnide E. Lawin. All authors contributed to the writing of the manuscript.

DATA AVAILABILITY STATEMENT

The Niger Basin Authority has strict policies in sharing daily data. However, we have tried our best to provide all relevant data in this paper or its supplementary information.

REFERENCES

- Abadzadesahraei, S. & Sui, J. 2016 Potential impacts of climate change on water resources in British Columbia communities. (26), 1–24. <https://doi.org/10.3390/w8010023>.
- Adeyeri, O. E., Laux, P., Lawin, A. E., Ige, S. O. & Kunstmann, H. 2019 Analysis of hydrometeorological variables over the transboundary Komadugu-Yobe basin, West Africa. *Journal of Water and Climate Change* 1–16. <https://doi.org/10.2166/wcc.2019.283>.
- Aich, V., Liersch, S., Vetter, T., Fournet, S., Andersson, J. C. M., Calmanti, S., van Weert, F. H. A., Hattermann, F. F. & Paton, E. N. 2016 Flood projections within the Niger river basin under future land use and climate change. *Science of the Total Environment* 562, 666–677. <https://doi.org/10.1016/j.scitotenv.2016.04.021>.
- Ali, A. & Lebel, T. 2009 The Sahelian standardized rainfall index revisited. *International Journal of Climatology* 29(12), 1705–1714. <https://doi.org/10.1002/joc>.
- Ali, R., Kuriqi, A., Abubaker, S. & Kisi, O. 2019 Long-term trends and seasonality detection of the observed flow in Yangtze river using Mann-Kendall and Sen's innovative trend method. *Water (Switzerland)* 11(9). <https://doi.org/10.3390/w11091855>.
- Amanambu, A. C., Li, L., Egbinola, C. N., Obarein, O. A., Mupenzi, C. & Chen, D. 2019 Catena spatio-temporal variation in rainfall-runoff erosivity due to climate change in the lower Niger basin, West Africa. *Catena* 172, 324–334. <https://doi.org/10.1016/j.catena.2018.09.003>.
- Amogu, O., Descroix, L., Yéro, K. S., Le Breton, E., Mamadou, I., Ali, A., Vischel, T., Bader, J.-C., Moussa, I. B., Gautier, E., Boubkraoui, S. & Belleudy, P. 2010 Increasing river flows in the Sahel? *Water* 2, 170–199. <https://doi.org/10.3390/w2020170>.
- Azur, M. J., Stuart, E. A., Frangakis, C. & Leaf, P. J. 2011 Multiple imputation by chained equations: what is it and how does it work? *International Journal of Methods in Psychiatric Research* 20(1), 40–49. <https://doi.org/10.1002/mpr.329>.
- Badou, D. F., Kapangaziwiri, E., Diekkrüger, B., Hounkpè, J. & Afouda, A. 2016 Evaluation of recent hydro-climatic changes in four tributaries of the Niger river basin (West Africa). *Hydrological Sciences Journal* 62(5), 1–14. <https://doi.org/10.1080/02626667.2016.1250898>.
- Barnes, S. A., Lindborg, S. R. & Seaman, J. W. 2006 Multiple imputation techniques in small sample clinical trials. *Statistics in Medicine* 25(2), 233–245. <https://doi.org/10.1002/sim.2231>.
- Biasutti, M. 2019 Rainfall trends in the African Sahel: characteristics, processes, and causes. *WIREs Clim Change* 1–22. <https://doi.org/10.1002/wcc.591>.
- Bichet, A. & Diedhiou, A. 2018 West African Sahel becomes wetter during the last 30 years but dry spells are shorter and more frequent. *Climate Research* (in press), 155–162. <https://doi.org/10.3354/cr01515>
- Burgan, H. I. & Aksoy, H. 2020 Monthly flow duration curve model for ungauged river basins. *Water (Switzerland)* 12(2), 1–19. <https://doi.org/10.3390/w12020338>.
- Chen, Y., Guan, Y., Shao, G. & Zhang, D. 2016 Investigating trends in streamflow and precipitation in Huangfuchuan basin with wavelet analysis and the Mann-Kendall test. *Water (Switzerland)* 8(3). <https://doi.org/10.3390/w8030077>.
- Criss, R. E. & Winston, W. E. 2008 Do Nash values have value? Discussion and alternate proposals. *Hydrological Processes* 22, 2723–2725. <https://doi.org/10.1002/hyp.7072>.
- Descroix, L., Guichard, F., Grippa, M., Lambert, L., Panthou, G., Mahé, G., Gal, L., Dardel, C., Quantin, G., Kergoat, L., Bouaïta, Y., Hiernaux, P., Vischel, T., Pellarin, T., Faty, B., Wilcox, C., Malam Abdou, M., Mamadou, I., Vandervaere, J.-P., Diongue-Niang, A., Ndiaye, O., Sané, Y., Dacosta, H., Gosset, M., Cassé, C., Sultan, B., Barry, A., Amogu, O., Nka Nnomo, B., Barry, A.

- & Paturol, J.-E. 2018 Evolution of surface hydrology in the Sahelo-Sudanian strip: an updated review. *Water* **10**(6), 748. <https://doi.org/10.3390/w10060748>.
- Dosio, A., Turner, A. G., Tamoffo, A. T., Sylla, M. B., Lennard, C., Jones, R. G., Terray, L., Nikulin, G. & Hewitson, B. 2020 A tale of two futures: contrasting scenarios of future precipitation for West Africa from an ensemble of regional climate models. *Environmental Research Letters* **15**(6), 064007. <https://doi.org/10.1088/1748-9326/ab7fde>.
- Ekeu-Wei, I. T., Blackburn, G. A. & Pedruco, P. 2018 Infilling missing data in hydrology: solutions using satellite radar altimetry and multiple imputation for data-sparse regions. *Water (Switzerland)* **10**(10). <https://doi.org/10.3390/w10101483>.
- Gupta, H. V., Kling, H., Yilmaz, K. K. & Martinez, G. F. 2009 Decomposition of the mean squared error and NSE performance criteria: implications for improving hydrological modelling. *Journal of Hydrology* **377**(1–2), 80–91. <https://doi.org/10.1016/j.jhydrol.2009.08.003>.
- Intergovernmental Panel on Climate Change (IPCC) 2019 *Climate Change and Land*. Available from: https://www.ipcc.ch/site/assets/uploads/2019/08/4-SPM_Approved_Microsite_FINAL.pdf (accessed 18 September 2019).
- KfW 2010 *Adaptation to Climate Change in the Upper and Middle Niger River Basin*. Available from: http://ccsl.iccip.net/niger_river_basin.pdf (accessed 12 February 2017).
- Kliment, Z., Matoušková, M. & Královec, V. 2011 Trend analysis of rainfall-Runoff regimes In selected headwater areas of The Czech Republic. *Journal of Hydrology Hydromechanics* **59**(1), 36–50. <https://doi.org/10.2478/v10098-011-0003-y>.
- Kling, H., Fuchs, M. & Paulin, M. 2012 Runoff conditions in the upper Danube basin under an ensemble of climate change scenarios. *Journal of Hydrology* **424–425**, 264–277.
- Lebel, T. & Ali, A. 2009 Recent trends in the Central and Western Sahel rainfall regime (1990–2007). *Journal of Hydrology* **375**(1–2), 52–64. <https://doi.org/10.1016/j.jhydrol.2008.11.030>.
- Little, R. J. A. 1992 Regression with missing X's: a review. *Journal of the American Statistical Association* **87**(420), 1227–1237. <https://doi.org/10.1080/01621459.1992.10476282>.
- Meusbürger, K., Steel, A., Panagos, P., Montanarella, L. & Alewell, C. 2012 Spatial and temporal variability of rainfall erosivity factor for Switzerland. *Hydrology and Earth System Sciences* **16**, 167–177. <https://doi.org/10.5194/hess-16-167-2012>.
- Nash, J. E. & Sutcliffe, J. V. 1970 River flow forecasting through conceptual models part I – A discussion of principles. *Journal of Hydrology* **10**(3), 282–290. [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6).
- Nka, B. N., Oudin, L., Karambiri, H., Paturol, J. E. & Ribstein, P. 2015 Trends in floods in West Africa: analysis based on 11 catchments. *Hydrology and Earth System Sciences* **19**, 4707–4719. <https://doi.org/10.5194/hess-19-4707-2015>.
- N'Tcha M'Po, Y., Lawin, E., Yao, B., Oyerinde, G. T., Attogouinon, A. & Afouda, A. 2017 Decreasing past and mid-century rainfall indices over the Ouémé river basin, Benin (West Africa). *Climate* **5**(3), 74. <https://doi.org/10.3390/cli5030074>.
- Ogilvie, A., Mahéé, G., Ward, J., Serpantié, G., Lemoalle, J., Morand, P., Barbier, B., Kaczan, D., Lukaszewicz, A., Paturol, J., Liéénou, G. & Clanet, J. C. 2010 Water, agriculture and poverty in the Niger river basin. *Water International* **35**(5), 594–622.
- Oguntunde, P. G. & Abiodun, B. J. 2013 The impact of climate change on the Niger river basin hydroclimatology, West Africa. *Climate Dynamics* **40**, 81–94. <https://doi.org/10.1007/s00382-012-1498-6>.
- Onyutha, C. & Willems, P. 2013 Uncertainties in flow-Duration-Frequency relationships of high and low flow extremes in lake Victoria basin. *Water (Switzerland)* **5**(4), 1561–1579. <https://doi.org/10.3390/w5041561>.
- Oyerinde, G. T. & Diekkrüger, B. 2017 Influence of parameter sensitivity and uncertainty on projected runoff in the upper Niger basin under a changing climate. *Climate* **5**(3), 1–13. <https://doi.org/10.3390/cli5030067>.
- Oyerinde, G. T., Hountondji, F. C. C., Wissler, D., Diekkrüger, B., Lawin, A. E., Odofin, A. J. & Afouda, A. 2015 Hydro-climatic changes in the Niger basin and consistency of local perceptions. *Regional Environmental Change* **15**(8), 1627–1637. <https://doi.org/10.1007/s10113-014-0716-7>.
- Oyerinde, G. T., Wissler, D., Hountondji, F. C. C., Odofin, A. J., Lawin, A. E., Afouda, A. & Diekkrüger, B. 2016 Quantifying uncertainties in modeling climate change impacts on hydropower production. *Climate* **4**(3), 1–15. <https://doi.org/10.3390/cli4030034>.
- Oyerinde, G. T., Fademi, I. O. & Denton, O. A. 2017a Modeling runoff with satellite-based rainfall estimates in the Niger basin. *Cogent Food & Agriculture* **2**, 1–12. <https://doi.org/10.1080/23311932.2017.1363340>.
- Oyerinde, G. T., Hountondji, F. C. C., Lawin, A. E., Odofin, A. J., Afouda, A. & Diekkrüger, B. 2017b Improving hydro-climatic projections with bias-correction in Sahelian Niger basin, West Africa. *Climate* **5**(1). <https://doi.org/10.3390/cli5010008>.
- Oyerinde, G. T., Lawin, E. A. & Odofin, A. J. 2017c Farmers' responses to changing hydrological trends in the Niger basin parts of Benin. *Hydrology* **4**(4), 52. <https://doi.org/10.3390/hydrology4040052>.
- Pettitt, A. N. 1979 A non-parametric approach to the change-point problem. *Applied Statistics*. <https://doi.org/10.2307/2346729>.
- Poméon, T., Jackisch, D. & Diekkrüger, B. 2017 Evaluating the performance of remotely sensed and reanalysed precipitation data over West Africa using HBV light. *Journal of Hydrology* **547**(2017), 222–235. <https://doi.org/10.1016/j.jhydrol.2017.01.055>.
- Poméon, T., Diekkrüger, B., Springer, A., Kusche, J. & Eicker, A. 2018 Multi-objective validation of SWAT for sparsely-gauged West African river basins – A remote sensing approach. *Water (Switzerland)* **10**(4). <https://doi.org/10.3390/w10040451>.
- Roudier, P., Ducharne, A. & Feyen, L. 2014 Climate change impacts on river discharge in West Africa: a review. *Hydrology and Earth System Sciences Discussions* **11**(2), 2483–2514. <https://doi.org/10.5194/hessd-11-2483-2014>.
- Schröder, S., Springer, A., Kusche, J., Uebbing, B., Fenoglio-Marc, L., Diekkrüger, B. & Pomeón, T. 2019 Niger discharge from radar altimetry: bridging gaps between gauge and altimetry time series. *Hydrology and Earth System Sciences* **23**(10), 4113–4128. <https://doi.org/10.5194/hess-23-4113-2019>.

- Sen, P. K. 1968 Оценки коэффициента регрессии по Тау Кендалла_Estimates of the regression coefficient based on Kendall's Tau. *Journal of the American Statistical Association* **63**(324), 1379–1389. <https://doi.org/10.1080/01621459.1968.10480934>.
- Sidibe, M., Dieppois, B., Mahe, G. & Paturel, J. 2018 Trend and variability in a new, reconstructed streamflow dataset for West and Central Africa, and climatic interactions, 1950–2005. *Journal of Hydrology*. <https://doi.org/10.1016/j.jhydrol.2018.04.024>.
- Sylla, M. B., Giorgi, F., Pal, J. S., Gibba, P., Kebe, I. & Nikiema, M. 2015 Projected changes in the annual cycle of high intensity precipitation events over West Africa for the late 21st century. *Journal of Climate* **28**(16), 6475–6488. <https://doi.org/http://dx.doi.org/10.1175/JCLI-D-14-00854.1>.
- Sylla, M. B., Pal, J. S., Faye, A., Dimobe, K. & Kunstmann, H. 2018 Climate change to severely impact West African basin scale irrigation in 2°C and 1.5°C global warming scenarios. *Scientific Reports* **8**(1), 14395. <https://doi.org/10.1038/s41598-018-32736-0>.
- Vahid, D. H., Noori, M., Heydari, M. & Sheikhi, M. 2015 A statistical review of top cited ISI papers regarding the different effects of climate change on rivers. *International Journal of Research and Innovations in Earth Science* **2**(5), 2394–1375. Retrieved from http://ijries.org/administrator/components/com_jresearch/files/publications/IJRIES_96_Final.pdf.
- van Buuren, S. & Groothuis-Oudshoorn, K. 2011 Mice: multivariate imputation by chained equations in R. *Journal of Statistical Software* **45**(3). <https://doi.org/10.18637/jss.v045.i03>.
- van der Heijden, G. J. M. G., Donders A, T., Stijnen T, R. & Moons, K. G. M. 2006 Imputation of missing values is superior to complete case analysis and the missing-indicator method in multivariable diagnostic research: a clinical example. *Journal of Clinical Epidemiology* **59**(10), 1102–1109. <https://doi.org/10.1016/j.jclinepi.2006.01.015>.
- Verstraeten, G., Poesen, J., Demarée, G. & Salles, C. 2006 Long-term (105 years) variability in rain erosivity as derived from 10-min rainfall depth data for Ukkel (Brussels, Belgium): implications for assessing soil erosion rates. *Journal of Geophysical Research Atmospheres* **111**(22), 1–11. <https://doi.org/10.1029/2006JD007169>.
- Yue, S. & Wang, C. Y. 2004 The Mann-Kendall test modified by effective sample size to detect trend in serially correlated hydrological series. *Water Resources Management* **18**(3), 201–218. <https://doi.org/10.1023/B:WARM.0000043140.61082.60>.

First received 29 November 2020; accepted in revised form 14 May 2021. Available online 28 May 2021